


FAST PART


DUAL FLUSH PUSH BUTTON VALVE

IMPORTANT: To obtain correct operation of this valve, the float chamber must be firstly primed. To guarantee full priming of the float, the first fill of the cistern must be up to the "Max. W.L.", marked on the valve body, (see below).

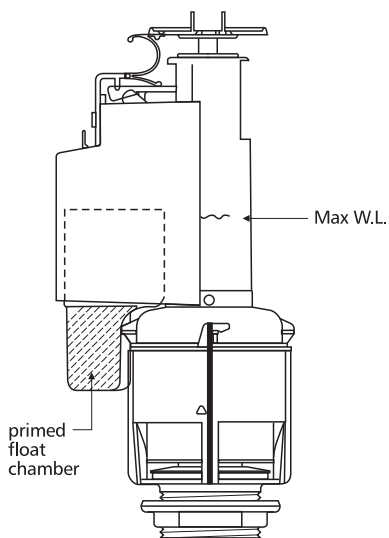

To maintain correct short flush volumes in hot climates, it may be necessary to carry out this procedure on a regular basis due to evaporation.

CISTERN WATER LINES

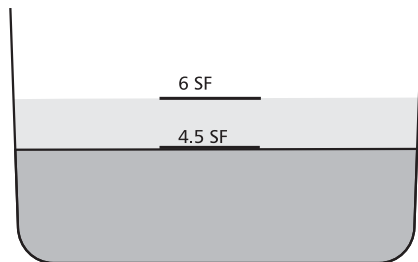

Water lines marked 4.5 SF and 6 SF are indicating full flush volumes in litres. These waterlines are for use with either a SF or DF "Fast Part" branded push button valve.